

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55°C~150°C  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+



2. 电气性能

Insert Configuration/针芯配置:1BP.308 8Low Voltage  
 Pin Size/接触件直径:  $\phi 0.7$ mm  
 Contact resistance接触电阻:  $\leq 12.5$  m $\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 950V(AC)  
 Rated working current额定工作电流: 5.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

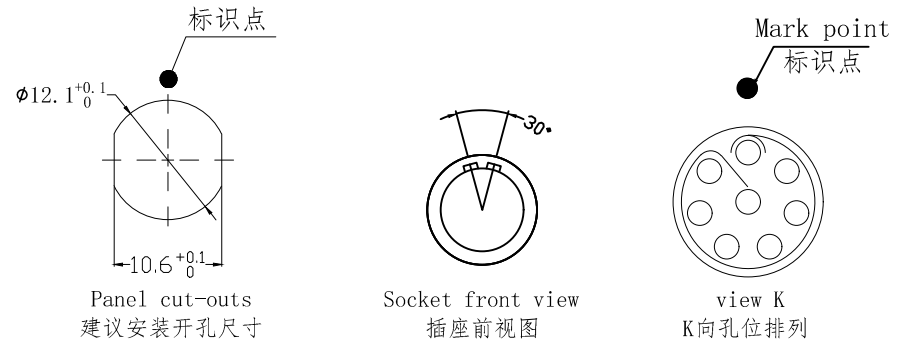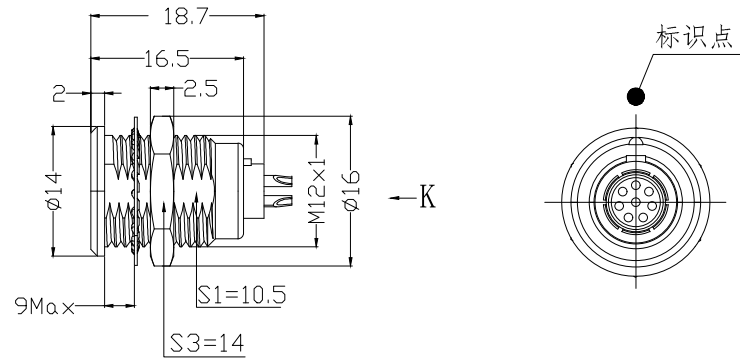

DRAWN BY:  
绘图: Z01 2024. 6. 17  
 CHECKED BY:  
审核: Z01 2024. 6. 17  
 APPROVED BY:  
核准: PD05 2024. 6. 17

MEIYILIAN 美易连  
 美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co. Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	FIRST ANGLE PROJECTION	单位 UNIT: mm	名称 PART NAME	ZG-1BP固定式插座
		比例 SCALE: 1: 1	型号 PART NAME	ZGA. 1BP. 308. KWLL
$\leq 10$ $\pm 0.1$		SIZE: A4		
$< 10^{\circ} \leq 20$ $\pm 0.15$		REV/版本	A1	
$< 20^{\circ} \leq 50$ $\pm 0.3$		SHEET: 1 OF 1		
Angle $\pm 1^{\circ}$				