

1) Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~200°C  
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 55dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr  
 P op (max)/最大环境压力: 60 bar (870 psi)  
 Insert Configuration/针芯配置: 20芯 接点代码: 038  
 Pin Size/接触件直径:  $\phi 0.5\text{mm}$   
 R (Max)/接触电阻:  $\leq 15\text{m}\Omega$   
 Differential transmission rate/差分传输速率: 3.4Gbps  
 Insulation resistance/绝缘电阻: 5000M $\Omega$   
 Withstand voltage/耐电压: 750V  
 Rated Current/额定电流: 1.8A

2) Mechanical data/机械特性:

Vibration/振动:  $1.0\text{G}^2/\text{Hz}$ , 均方根值36.6G,  $\leq 1\mu\text{s}$ 瞬断  
 Shock Resistance/冲击: 加速度2940m/s<sup>2</sup>,  $\leq 1\mu\text{s}$ 瞬断  
 Endurance (Shell)/机械寿命: 5000次



3) Other Specification/其它规格:

Contact PIN/接触件: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: Black chrome plated brass/铜镀黑铬  
 Other metal spare parts/其余金属件: Nickel plated brass/铜镀镍  
 Glue filling type/灌胶类型: White silica gel/白色硅胶  
 Insulator material/绝缘材料: PEEK  
 IP Rating/防护等级: IP68(2m水深24h) 插合状态

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求

型号命名 → FX · 104 · Z02 · K · 038 · B1 · A - H 1

主型号/ FX系列微圆形连接器	有接地片 1 无接地片 0
壳体代码/101-102-103 -1031-104-105-106	接触件端接形式/焊接H, 印制板接B, 弯式印制板W
插头插座形式/ T02-插头 Z02-插座	键位/N-A-B-C
外壳材质及镀层/ 铜合金镀珍珠铬(CC) 铜合金镀哑镍(C) 铜合金镀黑铬(K) 铝合金镀哑镍(F) 铝合金镀珍珠铬(XC)	接触件形式/ 插针-A1, 插孔-B1
	接点代码/ 051、052、054、056

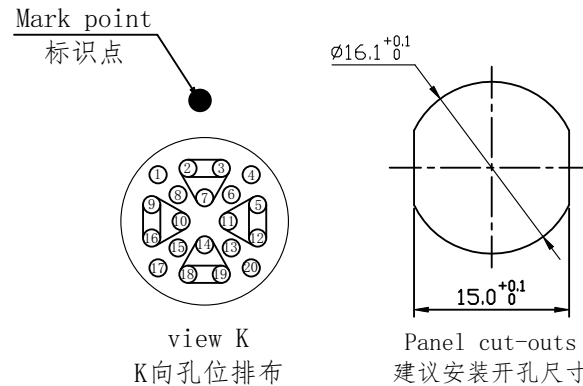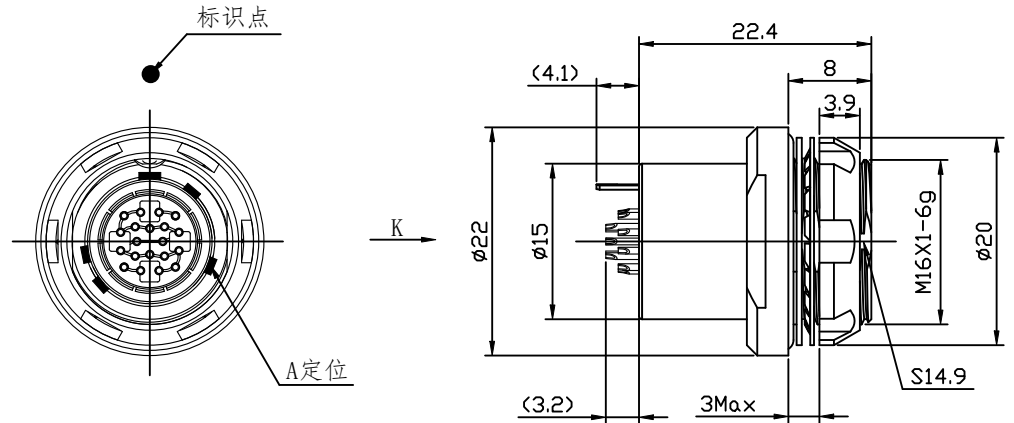

孔位	信号定义
2	DATA1+
7	Shield
3	DATA1-

孔位	信号定义	孔位	信号定义
5	DATA2+	11	Shield
1	Signal or Powr	12	DATA2-
8	Signal or Powr	18	DATA3+
15	Signal or Powr	14	Shield
17	Signal or Powr	19	DATA3-
13	Signal or Powr	9	DATA4+
20	Signal or Powr	10	Shield
4	Signal or Powr	16	DATA4-
6	Signal or Powr		

TOLERANCES UNLESS OTHERWISE SPECIFIED:		FIRST ANGLE PROJECTION		Product name/产品名称	
未标注尺寸公差: $\pm 0.1$ 未标注角度公差: $\pm 0.5^\circ$		SIZE: A4 UNITS: mm SCALE: 1: 1 SHEET: 1 OF 1		FX104 Socket FX104固定式插座	
DRAWN BY: 绘图: Pd04		DATE/日期 2023-03-10		QM NO 料号 FX104Z02K038B1A-H1	
CHECKED BY: 审核: Pd02		DATE/日期 2023-03-10		DRAWING NO 图号	
APPROVED BY: 核准: Pd02		DATE/日期 2023-03-10		CUSTOMER NO 客户料号	
				REV/版本 A1	
 QM(Quanma) Connector System Shenzhen Co. LTD 深圳市全马连接器有限公司					