



REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

1) Product main performance/产品主要性能指标:
 Operating Temperature/工作温度: -55°C~200°C
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能: 55dB(1GHz)
 Salt Spray Corrosion/盐雾: 96hr
 P op (max)/最大环境压力: 60 bar (870 psi)
 Insert Configuration/针芯配置: 20芯 代码: 038
 Pin Size/接触件直径: $\phi 0.5\text{mm}$
 R (Max)/接触电阻: $\leq 15\text{m}\Omega$
 Differential transmission rate/差分传输速率: 3.4Gbps
 Insulation resistance/绝缘电阻: 5000M Ω
 Withstand voltage/耐电压: 750V
 Rated Current/额定电流: 1.8A
 Cable AWG/配接电缆规格: $\phi 8.1-\phi 10\text{mm}/26\text{AWG}$

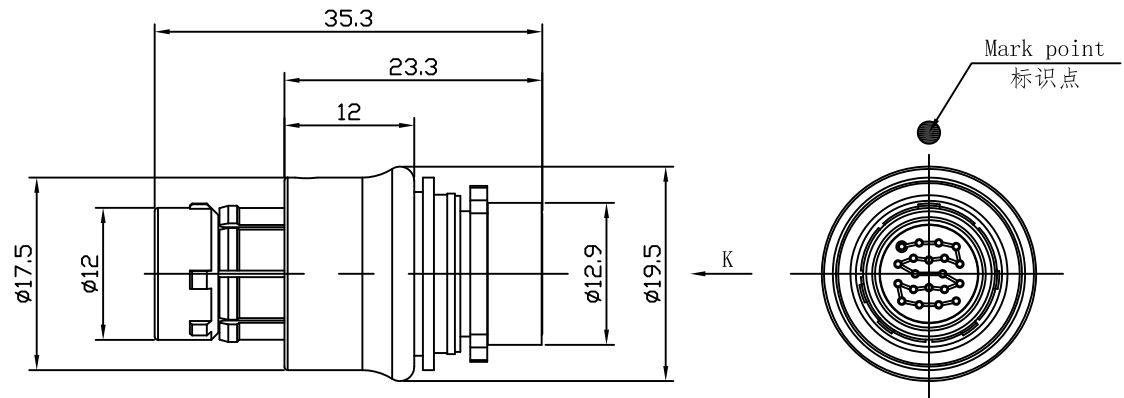


2) Mechanical data/机械特性:
 Vibration/振动: 1.0G²/Hz, 均方根值36.6G, $\leq 1\mu\text{s}$ 瞬断
 Shock Resistance/冲击: 加速度2940m/s², $\leq 1\mu\text{s}$ 瞬断
 Endurance (Shell)/机械寿命: 5000+

3) Other Specification/其它规格:
 Contact PIN/接触件: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: Chrome plated aluminium/铝合金镀珍珠铬
 Other metal spare parts/其余金属件: Nickel plated brass/铜镀镍
 Insulator material/绝缘材料: PEEK
 IP Rating/防护等级: IP68(2m水深24h) 插合状态
 *ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求

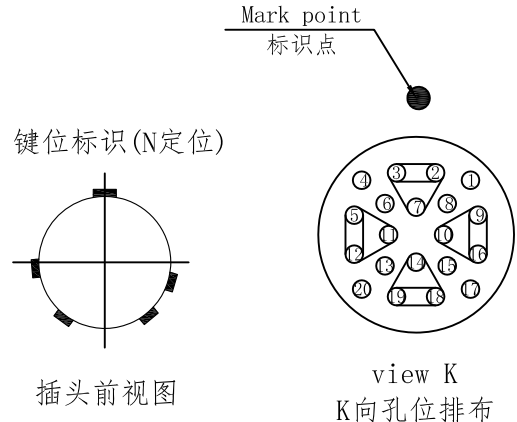

孔位	信号定义	孔位	信号定义
2	DATA1+	1	Signal or Power
7	Shield	8	Signal or Power
3	DATA1-	15	Signal or Power
5	DATA2+	17	Signal or Power
11	Shield	13	Signal or Power
12	DATA2-	20	Signal or Power
18	DATA3+	4	Signal or Power
14	Shield	6	Signal or Power
19	DATA3-		
9	DATA4+		
10	Shield		
16	DATA4-		

型号命名 → FX·104·T02·XC·038·A1·N-H·S

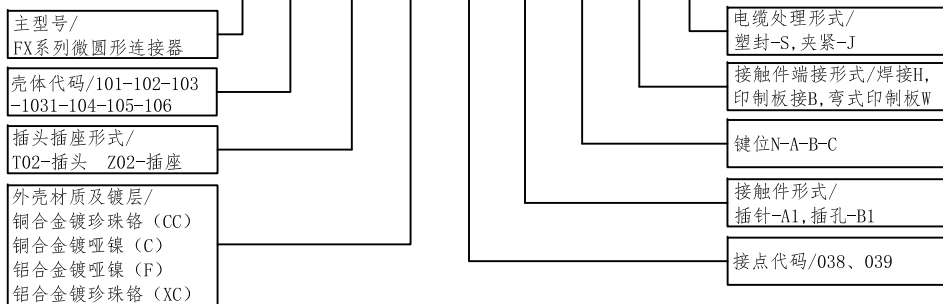

TOLERANCES UNLESS OTHERWISE SPECIFIED: 未标注尺寸公差: ± 0.1 未标注角度公差: $\pm 0.5^\circ$	FIRST ANGLE PROJECTION	Product name/产品名称 FX104 plug	
	SIZE: A4	UNITS: mm	
	SCALE: 1: 1	SHEET: 1 OF 1	
DRAWN BY: 绘图: PD04	DATE/日期: 2021-08-26	QM NO 料号: FX104T02XC038A1N-HS	REV/ 版本: A1
CHECKED BY: 审核: PD02	DATE/日期: 2021-08-26	DRAWING NO 图号	
APPROVED BY: 核准: PD02	DATE/日期: 2021-08-26	CUSTOMER NO 客户料号	
		 QM (Quanma) Connector Shenzhen Co. LTD 深圳市全马连接器有限公司	