

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$
Humidity(max)/最大潮湿 : $<=95\%$ [at 60 deg C / 140 F]
Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$
Endurance (Shell)/机械寿命 : 2000+




2. 电气性能



Insert Configuration/针芯配置: 1P. 310 10Low Voltage
Pin Size/接触件直径: $\phi 0.5\text{mm}$
Contact resistance/接触电阻: $\leq 15\text{m}\Omega$
Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))
Withstand voltage/耐电压: 750V(AC)
Rated working current/额定工作电流: 2.0A
Cable/配接电缆: $\phi 5.5\text{mm} - \phi 6.2\text{mm}$

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金
Housing Material/外壳材质 : PSU
Other Shell Material/其它壳体材质: PSU
Insulator material/绝缘体材料: PPS
IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

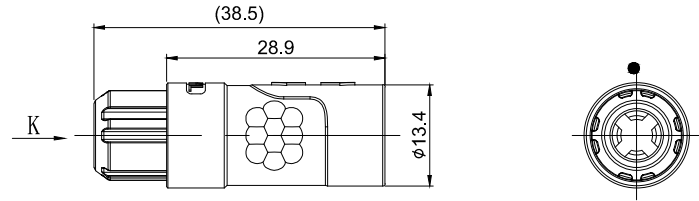

DRAWN BY: 绘图: P003 2024. 05. 28 CHECKED BY: 审核: Z01 2024. 05. 28 APPROVED BY: 核准: P005 2024. 05. 28		 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.								
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^{\circ} \leq 20 \pm 0.15$ $< 20^{\circ} \leq 50 \pm 0.3$ Angle $\pm 1^{\circ}$		 FIRST ANGLE PROJECTION	<table border="1"> <tr> <td>单位 UNTT: mm</td> <td rowspan="2">名称 PART NAME</td> <td rowspan="2">PRA-1P浮动式插座(不带护套式尾帽) PRA-1P Floating socket (without jacketed tail cap)</td> </tr> <tr> <td>比例 SCALE: 1: 1</td> </tr> <tr> <td>SIZE: A4</td> <td>型号 PART NAME</td> <td>PRA. 1P. 310. PLLC62G</td> </tr> </table>	单位 UNTT: mm	名称 PART NAME	PRA-1P浮动式插座(不带护套式尾帽) PRA-1P Floating socket (without jacketed tail cap)	比例 SCALE: 1: 1	SIZE: A4	型号 PART NAME	PRA. 1P. 310. PLLC62G
单位 UNTT: mm	名称 PART NAME	PRA-1P浮动式插座(不带护套式尾帽) PRA-1P Floating socket (without jacketed tail cap)								
比例 SCALE: 1: 1										
SIZE: A4	型号 PART NAME	PRA. 1P. 310. PLLC62G								
REV/版本	A1	SHEET: 1 OF 1								