

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $<=95\%$ [at $60 \text{ deg C} / 140 \text{ F}$]

Shielding /屏蔽性能: $75\text{dB}(10\text{MHz}) \quad 40\text{dB}(1\text{GHz})$

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$

Shock Resistance/冲击: $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命: $5000+$

Cable/配接电缆: $\phi 2.4\text{mm} - \phi 3.3\text{mm}$

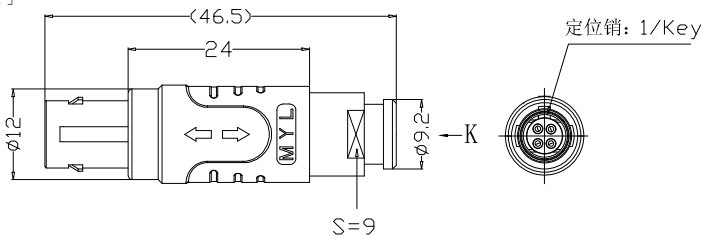

2. 电气性能

Insert Configuration/针芯配置: $1\text{BP.}304 \text{ 4Low Voltage}$

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压 $500\text{V}(\text{DC})$)

Withstand voltage/耐电压: $1350\text{V}(\text{AC})$

Rated working current额定工作电流: 10.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

Mark point

标识点



view K

K向孔位排列


DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P003	2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)

$\leq 10 \quad \pm 0.1$
 $< 10^{\circ} \leq 20 \quad \pm 0.15$
 $< 20^{\circ} \leq 30 \quad \pm 0.3$
Angle $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位
UNIT: mm

名称

比例
SCALE: 1: 1

型号
PART NAME

REV/版本

A1

SHEET: 1 OF 1

TG-1BP直式插头(带护套式尾帽)
TG-1BP Straight Plug
(with jacketed tail cap)

型号
PART NAME
TGG. 1BP. 304. KWKAD35Z