



1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $<95\%$  [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]  
 Shock Resistance/冲击: 100g[6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆: $\phi 4.1\text{mm}-\phi 5.0\text{mm}$

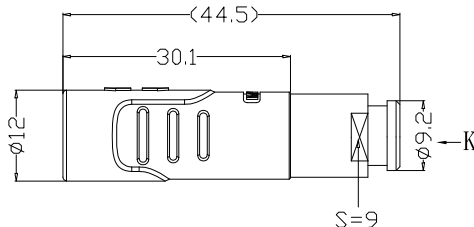


2. 电气性能

Insert Configuration/针芯配置: 1BP. 314 14Low Voltage  
 Pin Size/接触件直径: $\phi 0.5\text{mm}$   
 Contact resistance接触电阻: $\leq 15\text{m}\Omega$   
 Insulation resistance/绝缘电阻: 50000 $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 750V(AC)  
 Rated working current 额定工作电流: 2.0A



Plug front view  
插头前视图





view K  
K向孔位排列

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图: PD03 2024.05.28 CHECKED BY: 审核: Z01 2024.05.28 APPROVED BY: 核准: PD05 2024.05.28		 美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.	
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $<10^{\circ} \sim \leq 20 \pm 0.15$ $<20^{\circ} \sim \leq 50 \pm 0.3$ Angle $\pm 1^{\circ}$		 FIRST ANGLE PROJECTION	单位 UNIT: mm 名称 PART NAME: DHA-1BP浮动插座 (带护套式尾帽) DHA-1BP Floating socket (with jacketed tail cap)
比例 SCALE: 1:1 型号 SIZE: A4 SHEET: 1 OF 1		比例 SCALE: 1:1 型号 PART NAME: DHA. 1BP. 314. KWLD52Z	比例 SCALE: 1:1 型号 PART NAME: DHA. 1BP. 314. KWLD52Z