

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃

Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g [10Hz~2000Hz]

Shock Resistance/冲击: 100g [6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 5.1\text{mm}-\phi 6.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 1BP. 314 14Low Voltage

Pin Size/接触件直径:  $\phi 0.5\text{mm}$

Contact resistance接触电阻:  $\leq 15\text{m}\Omega$

Insulation resistance/绝缘电阻: 50000 $\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压: 750V(AC)

Rated working current额定工作电流: 2.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金



Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

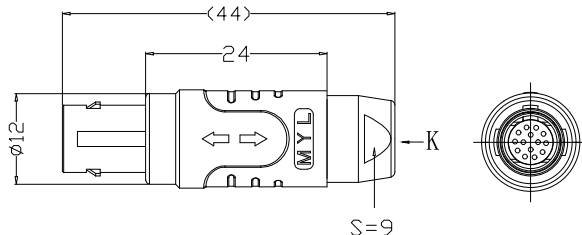

Plug front view  
插头前视图



view K  
K向孔位排列

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/谁画
--------	------------------	---------	-------------


DRAWN BY:  
绘图: PD03 2024.05.28  
CHECKED BY:  
审核: Z01 2024.05.28  
APPROVED BY:  
核准: PD05 2024.05.28



美易连电子科技(深圳)有限公司

Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)  
 $\leq 10 \pm 0.1$   
 $< 10^\circ \sim 20^\circ \pm 0.15$   
 $< 20^\circ \sim 50^\circ \pm 0.3$   
Angle  $\pm 1^\circ$



FIRST ANGLE PROJECTION

单位  
UNIT: mm  
比例  
SCALE: 1: 1

名称  
PART NAME

型号  
PART NAME

TG-1BP直式插头(不带护套式尾帽)  
TG-1BP Straight Plug  
(without jacketed tail cap)

TGA. 1BP. 314. KWLAD62

REV/版本 A1

SHEET. 1 OF 1