

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $\leq 95\%$ [at $60\text{ deg C} / 140\text{ F}$]

Shielding /屏蔽性能: $75\text{dB}(10\text{MHz})\ 40\text{dB}(1\text{GHz})$

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: $15\text{g}[10\text{Hz}\sim 2000\text{Hz}]$

Shock Resistance/冲击: $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命: $5000+$

Cable/配接电缆: $\phi 4.1\text{mm}-\phi 5.0\text{mm}$

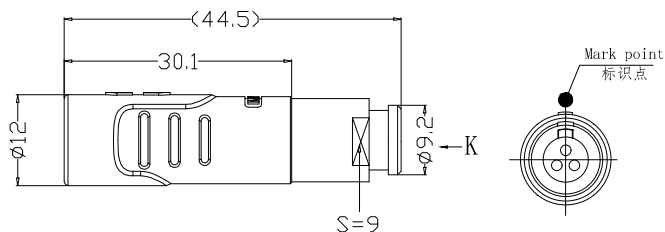

2. 电气性能

Insert Configuration/针芯配置: 1BP, 303 3Low Voltage

Pin Size/接触件直径: $\phi 1.3\text{mm}$

Contact resistance接触电阻: $\leq 5\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压 $500\text{V}(\text{DC})$)

Withstand voltage/耐电压: $1300\text{V}(\text{AC})$

Rated working current额定工作电流: 12.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view
插头前视图




view K
K向孔位排列

DRAWN BY: 绘图: P003	2024. 05. 28
CHECKED BY: 审核: Z01	2024. 05. 28
APPROVED BY: 核准: P003	2024. 05. 28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	UNIT: mm	名称	DHA-1BP浮动式插座(带护套式尾帽) DHA-1BP Floating socket (with jacketed tail cap)
$\leq 10\ \pm 0.1$	比例 SCALE: 1: 1	PART NAME	
$< 10^{\circ} \leq 20\ \pm 0.15$	SIZE: A1	型号	DHA. 1BP. 303. KWLLD5Z2
$< 20^{\circ} \leq 50\ \pm 0.3$	SHEET: 1 OF 1	PART NAME	
Angle $\pm 1^{\circ}$			



FIRST ANGLE PROJECTION

REV/版本 A1

<https://www.mylconnector.com/>

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8