

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55°C~150°C  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 4.1\text{mm}-\phi 5.0\text{mm}$



2. 电气性能

Insert Configuration/针芯配置: 1BP, 302 2Low Voltage  
 Pin Size/接触件直径:  $\phi 1.3\text{mm}$   
 Contact resistance接触电阻:  $\leq 5\text{m}\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V (DC))  
 Withstand voltage/耐电压: 1500V (AC)  
 Rated working current额定工作电流: 15.0A


Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

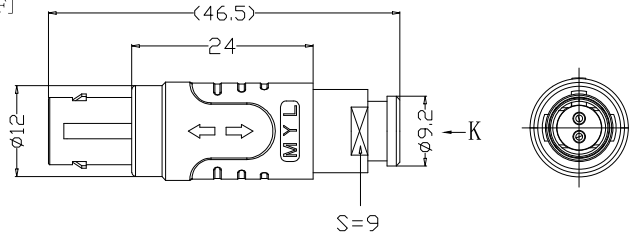

Plug front view  
插头前视图



view K  
K孔孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图
--------	------------------	---------	-------------

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28
GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10$	$\pm 0.1$
$< 10^\circ \leq 20$	$\pm 0.15$
$< 20^\circ \leq 50$	$\pm 0.3$
Angle	$\pm 1^\circ$

美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.		单位 UNIT: mm	名称	TG-1BP直式插头(带护套式尾帽) TG-1BP Straight Plug (with jacketed tail cap)
		比例 SCALE: 1:1	PART NAME	
FIRST ANGLE PROJECTION		SIZE: A4	型号	TGA. 1BP. 302. KWLAD52Z
		REV/版本: A1	SHEET: 1 OF 1	PART NAME

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8