

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $< 95\%$ [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 2.4\text{mm} - \phi 3.3\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 1BP.307 7Low Voltage

Pin Size/接触件直径: $\phi 0.7\text{mm}$

Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 950V(AC)

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK


Other Shell Material/其它壳体材质: 铜电镀

Insulator material/绝缘体材料: PEEK


IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

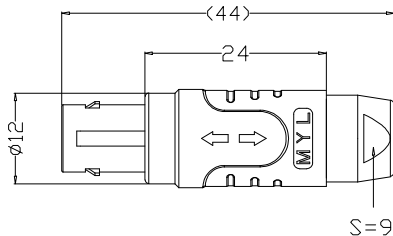


定位销: 1/Key



S=9

Mark point

标识点



view K

K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤ 10	± 0.1
$< 10^{\circ} \sim 20^{\circ}$	± 0.15
$< 20^{\circ} \sim 50^{\circ}$	± 0.3
Angle	$\pm 1^{\circ}$



FIRST ANGLE PROJECTION

REV/版本	A1
--------	----

UNIT: 比例 SCALE:	名称 PART NAME
mm 1:1	TGG-1BP直式插头 (不带护套式尾帽)
SIZE: A4	TG-1BP Straight Plug (without jacketed tail cap)
SHEET: 1 OF 1	型号 PART NAME
	TGG. 1BP. 307. KWKAD35

TG-1BP直式插头 (不带护套式尾帽)
TG-1BP Straight Plug
(without jacketed tail cap)

型号
PART NAME

TGG. 1BP. 307. KWKAD35