

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $\leq 95\%$ [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 2.4\text{mm}-\phi 3.3\text{mm}$

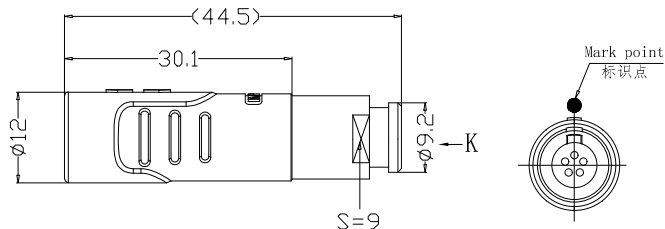

2. 电气性能

Insert Configuration/针芯配置: 1BP.305 5Low Voltage

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000 Ω (测试电压500V (DC))

Withstand voltage/耐电压: 1250V (AC)

Rated working current额定工作电流: 9.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view
插头前视图




view K
K向孔位排列

REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图: PPO3	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: PDK5	2024.05.28

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤ 10	± 0.1
$< 10^{\circ} \sim \leq 20$	± 0.15
$< 20^{\circ} \sim \leq 50$	± 0.3
Angle	$\pm 1^{\circ}$

 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.		单位 UNIT: mm	名称 名称 DHA-1BP浮动式插座 (带护套尾帽) DHA-1BP Floating socket (with jacketed tail cap)
		比例 SCALE: 1:1	
FIRST ANGLE PROJECTION		尺寸 SIZE: A4	型号 DHA. 1BP. 305. KWLDD35Z
REV/版本	A1	SHEET: 1 OF 1	