


1. Product main performance/产品主要性能指标:


Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$
 Humidity(max)/最大潮湿: $<95\%$ [at $60\text{ deg C} / 140\text{ F}$]
 Shielding /屏蔽性能: $75\text{dB}(10\text{MHz})\ 40\text{dB}(1\text{GHz})$
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g [$10\text{Hz}\sim 2000\text{Hz}$]
 Shock Resistance/冲击: 100g [6ms]
 Endurance (Shell)/机械寿命: $5000+$
 Cable/配接电缆: $\phi 3.1\text{mm}-\phi 4.0\text{mm}$

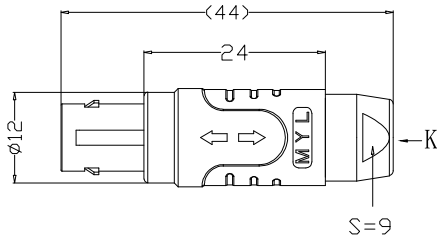

定位销: 1/Key



2. 电气性能

Insert Configuration/针芯配置: 1BP. 304 4Low Voltage
 Pin Size/接触件直径: $\phi 0.9\text{mm}$
 Contact resistance接触电阻: $\leq 9\text{m}\Omega$
 Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压 500V (DC))
 Withstand voltage/耐电压: 1350V (AC)
 Rated working current额定工作电流: 10.0A

Mark point

标识点



view K

K向孔位排列

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/绘图

DRAWN BY:
绘图: P003 2024.05.28
 CHECKED BY:
审核: Z01 2024.05.28
 APPROVED BY:
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)
 $\leq 10 \pm 0.1$
 $< 10^{\circ} \leq 20 \pm 0.15$
 $< 20^{\circ} \leq 30 \pm 0.3$
 Angle $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位
UNIT: mm
 比例
SCALE: 1:1
 名称
PART NAME

TG-1BP直式插头(不带护套式尾帽)
 TG-1BP Straight Plug
 (without jacketed tail cap)

型号
PART NAME

TGG. 1BP. 304. KWKAD42

REV/版本	A1	SHEET: 1 OF 1
--------	----	---------------