


# 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $< 95\%$  [at  $60 \text{ deg C} / 140 \text{ F}$ ]  
 Shielding /屏蔽性能:  $75\text{dB}(10\text{MHz}) \quad 40\text{dB}(1\text{GHz})$   
 Salt Spray Corrosion/盐雾:  $96\text{hr}$

## Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$   
 Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$   
 Endurance (Shell)/机械寿命:  $5000+$   
 Cable/配接电缆:  $\phi 5.1\text{mm} - \phi 6.0\text{mm}$

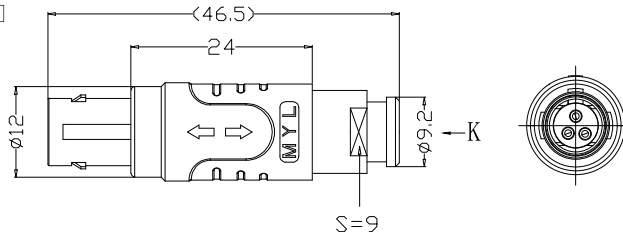


## 2. 电气性能

Insert Configuration/针芯配置: 1BP. 303 3Low Voltage  
 Pin Size/接触件直径:  $\phi 1.3\text{mm}$   
 Contact resistance接触电阻:  $\leq 5\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压 $500\text{V}(\text{DC})$ )  
 Withstand voltage/耐电压:  $1300\text{V}(\text{AC})$   
 Rated working current额定工作电流:  $12.0\text{A}$

## Other Specification/其它规格:



Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

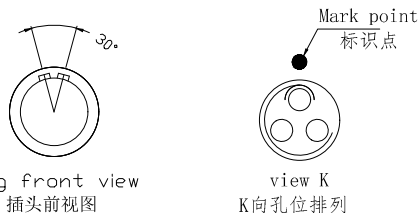\*ALL MATERIALS ARE ROHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图

view K  
K向孔位排列

DRAWN BY: 绘图: P003 CHECKED BY: 审核: Z01 APPROVED BY: 核准: P005 2024.05.28 2024.05.28 2024.05.28	 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	#位 UNIT: mm 名称 PART NAME 比例 SCALE: 1:1 型号 PART NAME SIZE: A4 SHEET: 1 OF 1	TG-1BP直式插头(带护套式尾帽) TG-1BP Straight Plug (with jacketed tail cap) TGA. 1BP. 303. KWKAD62Z
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \quad \pm 0.1$ $< 10^{\circ} \sim 20^{\circ} \quad \pm 0.15$ $< 20^{\circ} \sim 50^{\circ} \quad \pm 0.3$ Angle $\pm 1'$	FIRST ANGLE PROJECTION 	REV/版本 A1 https://www.myconnector.com/	https://www.myconnector.com/