


1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~150°C
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]
 Shock Resistance/冲击: 100g[6ms]
 Endurance (Shell)/机械寿命: 5000+
 Cable/配接电缆: ϕ 4.4mm- ϕ 5.3mm

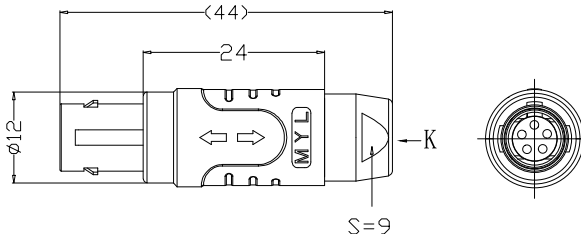


2. 电气性能

Insert Configuration/针芯配置: 1BP.305 5Low Voltage
 Pin Size/接触件直径: ϕ 0.9mm
 Contact resistance接触电阻: \leq 9m Ω
 Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))
 Withstand voltage/耐电压: 1250V(AC)
 Rated working current额定工作电流: 9.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

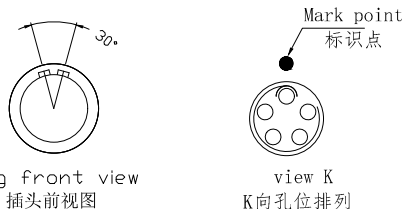

| REV/版本 | DESCRIPTION/变更内容 | DATE/日期 | DRAWN BY/绘图 |
|--------|------------------|---------|-------------|
| | | | |

DRAWN BY:
绘图: PDD3 2024.05.28
 CHECKED BY:
审核: Z01 2024.05.28
 APPROVED BY:
核准: PDD05 2024.05.28

MEIYILIAN 美易连电子科技(深圳)有限公司
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

| | | | |
|--|------------------------|--|---|
| GENERAL TOLERANCE (UNLESS SPECIFIED) \leq 10 \pm 0.1 $<$ 10° \leq 20 \pm 0.15 $<$ 20° \leq 50 \pm 0.3 Angle \pm 1° | FIRST ANGLE PROJECTION | #位 ENVT: mm 比例 SCALE: 1: 1 SIZE: A4 SHEET: 1 OF 1 | 名称 PART NAME TG-1BP直式插头(不带护套式尾帽) TG-1BP Straight Plug (without jacketed tail cap) |
| | | REV/版本 A1 | 型号 PART NAME TGA.1BP.305.KWKAD58 |