

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55°C~150°C  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi$ 4.4mm- $\phi$ 5.3mm

2. 电气性能



Insert Configuration/针芯配置: IBP.308 8Low Voltage  
 Pin Size/接触件直径:  $\phi$ 0.7mm  
 Contact resistance接触电阻:  $\leq$ 12.5m $\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 950V(AC)  
 Rated working current额定工作电流: 5.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/绘图

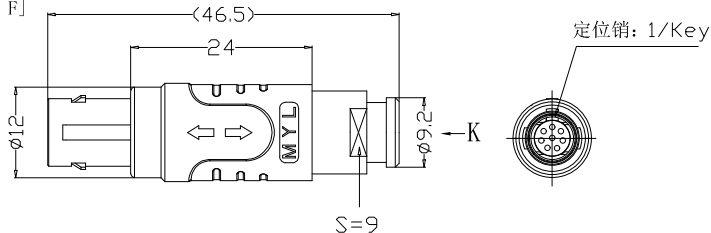

DRAWN BY: 绘图: PD05	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: PD05	2024.05.28

GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq$ 10	$\pm$ 0.1
$<$ 10 $^{\circ}$ $\leq$ 20	$\pm$ 0.15
$<$ 20 $^{\circ}$ $\leq$ 50	$\pm$ 0.3
Angle	$\pm$ 1 $^{\circ}$

美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.		单位 UNITS: mm	名称 PART NAME	TG-IBP直式插头(带护套式尾帽) TG-IBP Straight Plug (with jacketed tail cap)
		比例 SCALE: 1:1		
FIRST ANGLE PROJECTION		名称 PART NAME	型号 PART NAME	TGG. IBP. 308. KWKAD58Z
REV/版本	A1	SHEET: 1 OF 1		