

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $\leq 95\%$  [at  $60\text{ deg C} / 140\text{ F}$ ]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$  [10Hz~2000Hz]

Shock Resistance/冲击:  $100\text{g}$  [6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 6.1\text{mm}-\phi 7.0\text{mm}$

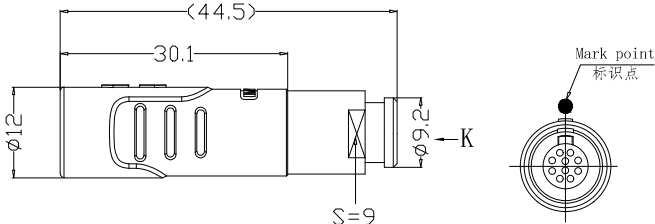

2. 电气性能

Insert Configuration/针芯配置: 1BP. 310 10Low Voltage

Pin Size/接触件直径:  $\phi 0.5\text{mm}$

Contact resistance接触电阻:  $\leq 15\text{m}\Omega$

Insulation resistance/绝缘电阻:  $50000\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压:  $900\text{V}$  (AC)

Rated working current额定工作电流:  $2.5\text{A}$

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



view K  
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司  
Meiyilian electronic technology (shenzhen) Co., Ltd.

<p>FIRST ANGLE PROJECTION</p>	单位 UNIT: mm 比例 SCALE: 1:1	名称 PART NAME	DHG-1BP浮动插座(带护套式尾帽) DHG-1BP floating socket (with jacketed tail cap)
	尺寸 SIZE: A4	型号 PART NAME	DHG. 1BP. 310. KWKL72Z
REV/版本 A1	SHEET: 1 OF 1		