

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $<95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$  [10Hz~2000Hz]

Shock Resistance/冲击:  $100\text{g}$  [6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 4.1\text{mm} - \phi 5.0\text{mm}$

## 2. 电气性能

Insert Configuration/针芯配置: 1BP, 316 16Low Voltage

Pin Size/接触件直径:  $\phi 0.5\text{mm}$

Contact resistance接触电阻:  $\leq 15\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压: 750V(AC)

Rated working current额定工作电流: 1.5A

### Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金




Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

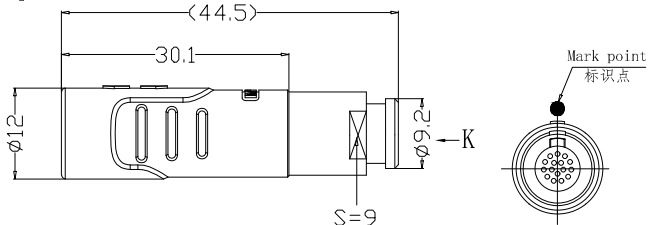

Plug front view  
插头前视图



view K  
K向孔位排列


REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/制图

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司  
Meilylian electronic technology(shenzhen)Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10$	$\pm 0.1$
$< 10^{\circ} \leq 20$	$\pm 0.15$
$< 20^{\circ} \leq 50$	$\pm 0.3$
Angle	$\pm 1^{\circ}$



FIRST ANGLE PROJECTION

REV/版本	A1
--------	----

单位 UNIT: mm	名称	D11-1B1浮动式插座(带护套式尾帽)
比例 SCALE: 1: 1	PART NAME	D11-1B1 Floating socket (with jacketed tail cap)
SIZE: A4	型号	DHA. 1BP. 316. KWLLD52Z
SHEET: 1 OF 1	PART NAME	

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8