

### 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $\leq 95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Shielding /屏蔽性能:  $75\text{dB}(10\text{MHz}) \quad 40\text{dB}(1\text{GHz})$

Salt Spray Corrosion/盐雾: 96hr


### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$

Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 4.1\text{mm} - \phi 5.0\text{mm}$

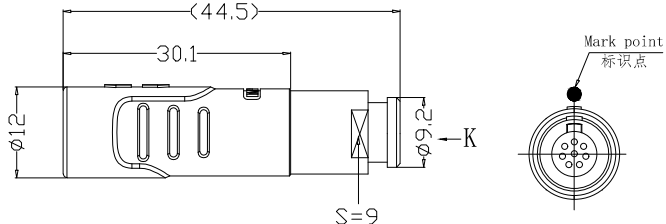

### 2. 电气性能

Insert Configuration/针芯配置: 1BP. 308 8Low Voltage

Pin Size/接触件直径:  $\phi 0.7\text{mm}$

Contact resistance接触电阻:  $\leq 12.5\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压:  $950\text{V(AC)}$

Rated working current额定工作电流:  $5.0\text{A}$

### Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图


view K  
K向孔位排列

DRAWN BY: 2024.05.28  
绘图: P003  
CHECKED BY: 2024.05.28  
审核: Z01  
APPROVED BY: 2024.05.28  
核准: P005



美易连电子科技(深圳)有限公司  
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)  
 $\leq 10 \pm 0.1$   
 $< 10^{\circ} \leq 20 \pm 0.15$   
 $< 20^{\circ} \leq 30 \pm 0.3$   
Angle  $\pm 1^{\circ}$



单位  
UNIT: mm  
比例  
SCALE: 1:1  
SIZE: A4

名称  
PART NAME  
DHA-1BP浮动式插座(带护套式尾帽)  
DHA-1BP Floating socket  
(with jacketed tail cap)

REV/版本  
A1

SHEET: 1 OF 1

型号  
PART NAME  
DHA. 1BP. 308. KWKLD52Z