

1. Product main performance / 产品主要性能指标:

Operating Temperature / 工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$
 Humidity(max) / 最大潮湿: $<=95\%$ [at $60^{\circ}\text{C} / 140^{\circ}\text{F}$]
 Shielding / 屏蔽性能: 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion / 盐雾: 96hr

Mechanical data / 机械特性:

Vibration / 振动: $15\text{g} [10\text{Hz} \sim 2000\text{Hz}]$
 Shock Resistance / 冲击: $100\text{g} [6\text{ms}]$
 Endurance (Shell) / 机械寿命: 5000+

2. 电气性能



Insert Configuration / 针芯配置: 1BP. 307 7Low Voltage
 Pin Size / 接触件直径: $\varnothing 0.7\text{mm}$
 Contact resistance / 接触电阻: $\leq 12.5\text{m}\Omega$
 Insulation resistance / 绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))
 Withstand voltage / 耐压: 950V(AC)
 Rated working current / 额定工作电流: 7.0A

Other Specification / 其它规格:


Contact PIN / 接触体: Gold plated Tin bronze / 锡青铜镀金
 Housing Material / 外壳材质: PEEK
 Other Shell Material / 其它壳体材质: 铜镀镍
 Insulator material / 绝缘体材料: PPS
 IP Rating / 防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT / 所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘制

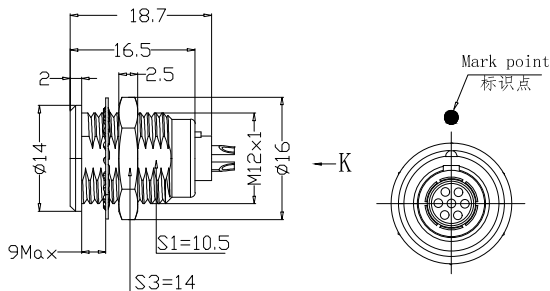

Panel cut-outs
建议安装开孔尺寸



Socket front view
插座前视图



view K
K孔位排列


DRAWN BY:
绘图: P003 2024.05.28
 CHECKED BY:
审核: Z01 2024.05.28
 APPROVED BY:
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)

$\leq 10 \pm 0.1$
 $< 10^{\circ} \sim 30^{\circ} \pm 0.15$
 $< 20^{\circ} \sim 50^{\circ} \pm 0.3$
 Angle $\pm 1^{\circ}$



单位
UNIT: mm
 比例
SCALE: 1:1
 型号
SIZE: A4

名称
PART NAME
ZGA-1BP 固定式插座
ZGA-1BP Fixed socket

型号
PART NAME
ZGA. 1BP. 307. KWLL

REV/版本 A1 SHEET: 1 OF 1