

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 :  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿 :  $\leq 95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 :  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$   
 Shock Resistance/冲击 :  $100\text{g}[6\text{ms}]$   
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 4.1\text{mm} - \phi 5.0\text{mm}$

2. 电气性能


Insert Configuration/针芯配置: 1BP. 304 4Low Voltage  
 Pin Size/接触件直径:  $\phi 0.9\text{mm}$   
 Contact resistance接触电阻:  $\leq 9\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $50000\Omega$  (测试电压500V (DC))  
 Withstand voltage/耐电压: 1350V (AC)  
 Rated working current额定工作电流: 10.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质 : 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级 : IP50



\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

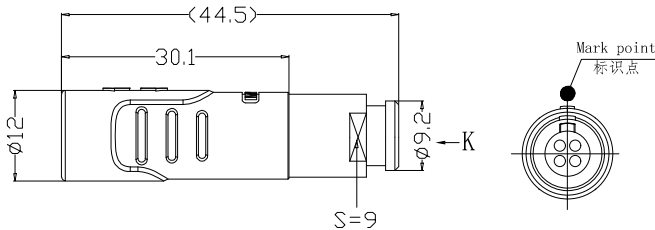


S=9

Mark point  
标识点



Socket front view  
插座前视图




view K  
K向孔位排列

DRAWN BY:  
绘图: P003 2024.05.28  
 CHECKED BY:  
审核: Z01 2024.05.28  
 APPROVED BY:  
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)  
 $\le 10 \pm 0.1$   
 $< 10^{\circ} \sim \le 20^{\circ} \pm 0.15$   
 $< 20^{\circ} \sim \le 50^{\circ} \pm 0.3$   
 Angle  $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位  
UNIT: mm  
 比例  
SCALE: 1:1  
 SIZE: A4

名称 PART NAME	DHA-1BP浮动式插座(带护套式尾帽) DHA-1BP Floating socket (with jacketed tail cap)
-----------------	---

型号 PART NAME	DHA. 1BP. 304. KWLLD52Z
-----------------	-------------------------

REV/版本 A1 SHEET: 1 OF 1