

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃

Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 3.1\text{mm}-\phi 4.0\text{mm}$

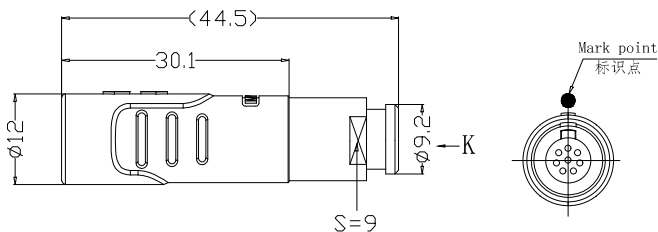

2. 电气性能

Insert Configuration/针芯配置: 1BP.308 8Low Voltage

Pin Size/接触件直径: $\phi 0.7\text{mm}$

Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 950V(AC)

Rated working current额定工作电流: 5.0A



Socket front view
插座前视图

view K
K向孔位排列

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图: P003		2024. 05. 28	
CHECKED BY: 审核: Z01		2024. 05. 28	
APPROVED BY: 核准: P003		2024. 05. 28	
GENERAL TOLERANCE (UNLESS SPECIFIED)			
≤10 ±0.1			
<10° ≤20 ±0.15			
<20° ≤50 ±0.3			
Angle ±1°			



美易连电子科技(深圳)有限公司

Meiyilian electronic technology (shenzhen) Co., Ltd.



FIRST ANGLE PROJECTION

单位
(UNIT: mm)

比例
(SCALE: 1: 1)

名称
PART NAME

DHA-1BP浮动式插座(带护套式尾帽)
DHA-1BP floating socket
(with jacketed tail cap)

型号
PART NAME

DHA. 1BP. 308. KWLLD42Z

REV/版本

A1

SHEET: 1 OF 1