

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~150°C

Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 2.4\text{mm}-\phi 3.3\text{mm}$

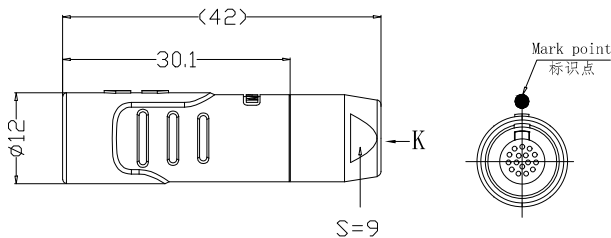

2. 电气性能

Insert Configuration/针芯配置: 1BP. 316 16Low Voltage

Pin Size/接触件直径: $\phi 0.5\text{mm}$

Contact resistance接触电阻: $\leq 15\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V (DC))

Withstand voltage/耐电压: 750V (AC)

Rated working current额定工作电流: 1.5A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Socket front view
插座前视图




view K
K向孔位排列

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/制图

DRAWN BY: 绘图: P003	2024. 05. 28
CHECKED BY: 审核: Z01	2024. 05. 28
APPROVED BY: 核准: P005	2024. 05. 28

	美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.		
	单位 UMT: mm 比例 SCALE: 1:1	名称 PART NAME	DHA-1BP浮动式插座(不带护套式尾盖) DHA-1BP Floating socket (without jacketed tail cap)

GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^\circ \leq 20 \pm 0.15$ $< 20^\circ \leq 50 \pm 0.3$ Angle $\pm 1^\circ$	
FIRST ANGLE PROJECTION 	型号 PART NAME

REV/版本 A1	SIZE: A4 SHEET: 1 OF 1	型号 PART NAME	DHA. 1BP. 316. KWLLD35
--------------	---------------------------	-----------------	------------------------

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8