

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr


Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 4.4\text{mm}-\phi 5.3\text{mm}$

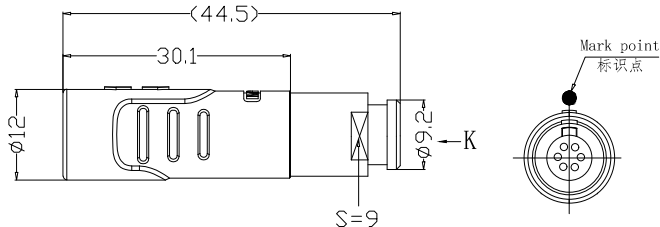

2. 电气性能

Insert Configuration/针芯配置: 1BP. 306 6Low Voltage

Pin Size/接触件直径: $\phi 0.7\text{mm}$

Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1050V(AC)

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK


Other Shell Material/其它壳体材质: 铜电镀

Insulator material/绝缘体材料: PEEK


IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图



Socket front view
插座前视图



view K
K向孔位排列



FIRST ANGLE PROJECTION

REV/版本 A1

<https://www.mylconnector.com/>

DRAWN BY: 绘图: P003	2024. 05. 28
CHECKED BY: 审核: Z01	2024. 05. 28
APPROVED BY: 核准: P005	2024. 05. 28
GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10 \pm 0.1$	
$< 10^\circ \leq 20 \pm 0.15$	
$< 20^\circ \leq 50 \pm 0.3$	
Angle $\pm 1^\circ$	

		美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.	
		单位 UNT: mm 比例 SCALE: 1: 1 名称 PART NAME:	DIM-1BP浮动插座(带护套式尾帽) DIM-1BP Floating socket (with jacketed tail cap)
型号 PART NAME:	DHIA. 1BP. 306. KWKL058Z		

<https://www.mylconnector.com/>