

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $\leq 95\%$ [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr



Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 3.4\text{mm}-\phi 4.3\text{mm}$

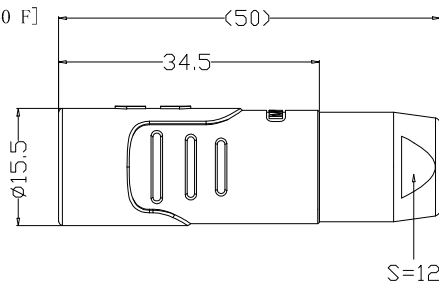

2. 电气性能

Insert Configuration/针芯配置: 2BP.305 5Low Voltage

Pin Size/接触件直径: $\phi 1.3\text{mm}$

Contact resistance接触电阻: $\leq 5\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1750V(AC)

Rated working current额定工作电流: 14.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜电镀


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Socket front view
插座前视图



view K
K向孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图
--------	------------------	---------	-------------

DRAWN BY: 绘图: PDK5	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: PDK5	2024.05.28

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤ 10	± 0.1
$< 10^{\circ} \sim \leq 20$	± 0.15
$< 20^{\circ} \sim \leq 50$	± 0.3
Angle	$\pm 1^{\circ}$



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

<p>FIRST ANGLE PROJECTION</p>	单位 UNIT: mm	名称 PART NAME:	MIA-2BP浮动式插座(不保护夹式尾座) DHA-2BP Floating socket (without jacketed tail cap)
	比例 SCALE: 1: 1	型号 PART NAME	DHA. 2BP. 305. KWLLD45
REV/版本	A1	SHEET: 1 OF 1	

1 2 3 4 5 6 7 8

A

B

C

D

1 2 3 4 5 6 7 8