

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr


Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: ϕ 7.1mm- ϕ 8.0mm

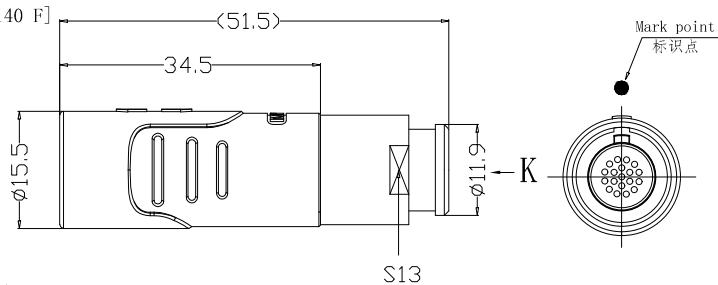

2. 电气性能

Insert Configuration/针芯配置: 2BP. 319 19Low Voltage

Pin Size/接触件直径: ϕ 0.7mm

Contact resistance接触电阻: \leq 12.5m Ω

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V (DC))

Withstand voltage/耐电压: 950V (AC)

Rated working current额定工作电流: 5.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PEEK

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Socket front view
插座前视图




view K
K向孔位排列

DRAWN BY:
绘图: P003 2024.05.28
CHECKED BY:
审核: Z01 2024.05.28
APPROVED BY:
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)
 \leq 10 \pm 0.1
<10° \leq 20 \pm 0.15
<20° \leq 50 \pm 0.3
Angle \pm 1°



单位 UNT: mm	名称 PART NAME	DHA-2BP浮动式插座 (带护套式尾帽) DHA-2BP Floating socket (with jacketed tail cap)
比例 SCALE: 1: 1	型号 PART NAME	DHA. 2BP. 319. KWKLD8Z2
尺寸 SIZE: A4	REV/版本 A1	SHEET: 1 OF 1