

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$
 Humidity(max)/最大潮湿 : $\leq 95\%$ [at $60 \text{ deg C} / 140 \text{ F}$]
 Shielding /屏蔽性能 : $75\text{dB}(10\text{MHz})$ $40\text{dB}(1\text{GHz})$
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$
 Shock Resistance/冲击 : $100\text{g}[6\text{ms}]$
 Endurance (Shell)/机械寿命 : 5000+
 Cable/配接电缆: $\phi 3.4\text{mm} - \phi 4.3\text{mm}$



2. 电气性能

Insert Configuration/针芯配置: 2BP. 318 18Low Voltage
 Pin Size/接触件直径: $\phi 0.7\text{mm}$
 Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$
 Insulation resistance/绝缘电阻: 5000Ω (测试电压500V(DC))
 Withstand voltage/耐电压: 850V(AC)
 Rated working current额定工作电流: 5.5A


Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质 : PEEK
 Other Shell Material/其它壳体材质 : 铜镀镍
 Insulator material/绝缘体材料: PPS
 IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

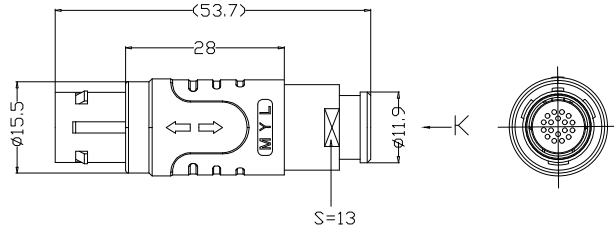

Plug front view
插头前视图



view K
K到孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图


DRAWN BY:
绘图: P003 2024.05.28
 CHECKED BY:
审核: Z01 2024.05.28
 APPROVED BY:
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司
 Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)

≤ 10	± 0.1
$< 10^{\circ} \sim \leq 20$	± 0.15
$< 20^{\circ} \sim \leq 50$	± 0.3
Angle	$\pm 1^{\circ}$



单位 UNIT: mm	名称 PART NAME	TG-2BP直式插头(带护套式尾帽) TG-2BP Straight Plug (with jacketed tail cap)
比例 SCALE: 1:1	型号 PART NAME	TGA. 2BP. 318. KWLAD45Z
SIZE: A4		
REV/版本 A1	SHEET: 1 OF 1	