

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $<=95\%$  [at  $60 \text{ deg C} / 140 \text{ F}$ ]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$ [ $10\text{Hz} \sim 2000\text{Hz}$ ]  
 Shock Resistance/冲击:  $100\text{g}$ [ $6\text{ms}$ ]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi 3.4\text{mm} - \phi 4.3\text{mm}$

## 2. 电气性能



Insert Configuration/针芯配置: 2BP. 318 18Low Voltage  
 Pin Size/接触件直径:  $\phi 0.7\text{mm}$   
 Contact resistance接触电阻:  $\leq 12.5\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压 $500\text{V}$ (DC))  
 Withstand voltage/耐电压:  $850\text{V}$ (AC)  
 Rated working current额定工作电流:  $5.5\text{A}$

### Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图

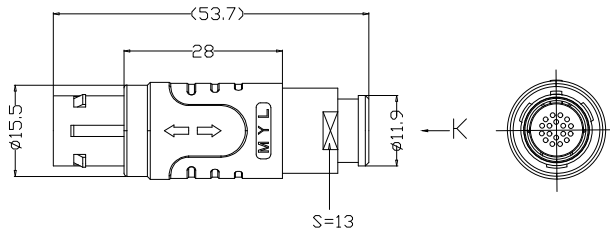

Plug front view  
插头前视图



view K  
K向孔位排列

DRAWN BY:  
绘图: PDD3 2024.05.28  
 CHECKED BY:  
审核: Z01 2024.05.28  
 APPROVED BY:  
核准: PD05 2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^{\circ} \sim 50^{\circ} \pm 0.15$ $< 20^{\circ} \sim 50^{\circ} \pm 0.3$ Angle $\pm 1^{\circ}$		单位 UNIT: mm	名称 PART NAME	TG-2BP直式插头(带护套式尾帽) TG-2BP Straight Plug (with jacketed tail cap)
	FIRST ANGLE PROJECTION	比例 SCALE: 1: 1	型号 PART NAME	TGA. 2BP. 318. KWKAD45Z
REV/版本	A1	SIZE: A4	SHEET: 1 OF 1	