

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]
 Shock Resistance/冲击 : 100g[6ms]
 Endurance (Shell)/机械寿命 : 5000+
 Cable/配接电缆: Ø5.1mm-Ø6.0mm




2. 电气性能

Insert Configuration/针芯配置:2BP. 332 32Low Voltage
 Pin Size/接触件直径:Ø0.5mm
 Contact resistance接触电阻:≤15mΩ
 Insulation resistance/绝缘电阻:5000MΩ (测试电压500V(DC))
 Withstand voltage/耐电压:800V(AC)
 Rated working current额定工作电流:1.5A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质 : PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

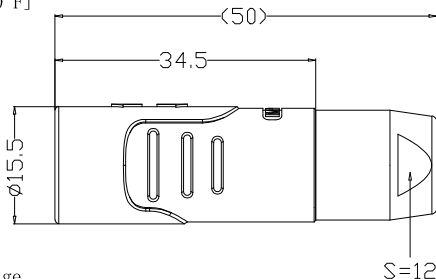

view K
K向孔位排列

REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图: PPOG	2024.05.28
CHECKED BY: 审核: ZOI	2024.05.28
APPROVED BY: 核准: PPOG	2024.05.28



美易连电子科技(深圳)有限公司
 Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤10	±0.1
<10° ≤20	±0.15
<20° ≤50	±0.3
Angle	±1°

 FIRST ANGLE PROJECTION	单位 UNIT: mm	名称	DHG-2BP浮动式插座(不带护套式尾帽) DHG-2BP Floating socket (without jacketed tail cap)
	比例 SCALE: 1:1	PART NAME	
	SIZE: A4	型号	DHG. 2BP. 332. KWKL062
REV/版本	A1	SHEET: 1 OF 1	PART NAME

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8