


1. Product main performance/产品主要性能指标:


Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$
 Humidity(max)/最大潮湿: $\leq 95\%$ [at $60\text{ deg C} / 140\text{ F}$]
 Shielding /屏蔽性能: $75\text{dB}(10\text{MHz})$ $40\text{dB}(1\text{GHz})$
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g [$10\text{Hz}\sim 2000\text{Hz}$]
 Shock Resistance/冲击: 100g [6ms]
 Endurance (Shell)/机械寿命: 5000+
 Cable/配接电缆: $\phi 8.1\text{mm}-\phi 9.0\text{mm}$

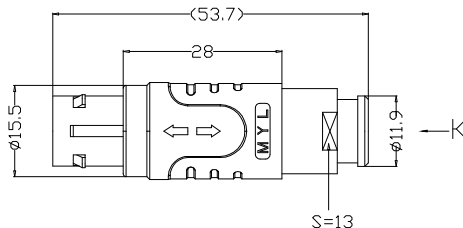

定位销: 1/Key




2. 电气性能

Insert Configuration/针芯配置: 2BP. 302 2Low Voltage
 Pin Size/接触件直径: $\phi 2.0\text{mm}$
 Contact resistance接触电阻: $\leq 3.5\text{m}\Omega$
 Insulation resistance/绝缘电阻: 5000Ω (测试电压 $500\text{V}(\text{DC})$)
 Withstand voltage/耐电压: $2100\text{V}(\text{AC})$
 Rated working current额定工作电流: 30.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PPS
 IP Rating/防护等级: IP50
***ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.**



view K
K向孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司
 Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤ 10	± 0.1
$< 10^{\circ} \sim \leq 20$	± 0.15
$< 20^{\circ} \sim \leq 50$	± 0.3
Angle	$\pm 1^{\circ}$



单位 UNIT: mm	名称	TG-2BP直式插头(带护套式尾帽)
比例 SCALE: 1:1	PART NAME	TG-2BP Straight Plug (with jacketed tail cap)

REV/版本	A1	SHEET: 1 OF 1	型号	TGG. 2BP. 302. KWLAD92Z
PART NAME		PART NAME		