

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr


Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: Ø5.1mm-Ø6.0mm

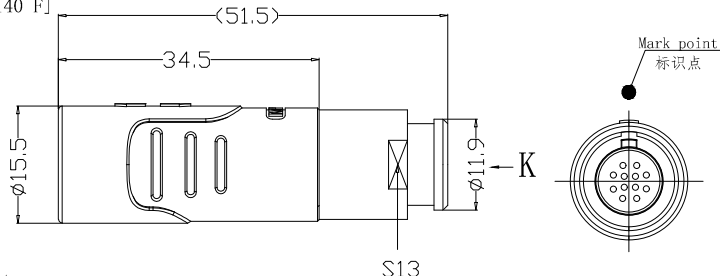

2. 电气性能

Insert Configuration/针芯配置: 2BP. 312 12Low Voltage

Pin Size/接触件直径: Ø0.7mm

Contact resistance接触电阻: ≤12.5mΩ

Insulation resistance/绝缘电阻: 5000MΩ (测试电压500V (DC))

Withstand voltage/耐电压: 1250V (AC)

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.





Socket front view
插座前视图



view K
K向孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图
--------	------------------	---------	-------------

DRAWN BY: 绘图: P003 2024.05.28		 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.		
CHECKED BY: 审核: Z01 2024.05.28				
APPROVED BY: 核准: P005 2024.05.28				
GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10° ≤20 ±0.15 <20° ≤50 ±0.3 Angle ±1°		单位 UNIT: mm	名称 PART NAME	DHA-2BP浮动式插座(带护套式尾帽) DHA-2BP Floating socket (with jacketed tail cap)
FIRST ANGLE PROJECTION 		比例 SCALE: 1:1	型号 PART NAME	
REV/版本	A1	SHEET: 1 OF 1	型号 PART NAME	DHA. 2BP. 312. KWLLD62Z