

1. Product main performance / 产品主要性能指标:

Operating Temperature / 工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max) / 最大潮湿:  $<=95\%$  [at  $60^{\circ}\text{deg C} / 140\text{ F}$ ]  
 Shielding / 屏蔽性能:  $75\text{dB}(10\text{MHz}) \quad 40\text{dB}(1\text{GHz})$   
 Salt Spray Corrosion / 盐雾:  $96\text{hr}$

Mechanical data / 机械特性:

Vibration / 振动:  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$   
 Shock Resistance / 冲击:  $100\text{g}[6\text{ms}]$   
 Endurance (Shell) / 机械寿命:  $5000+$   
 Cable / 配接电缆:  $\phi 7.1\text{mm} - \phi 8.0\text{mm}$

2. 电气性能

Insert Configuration / 针芯配置:  $2\text{BP. } 318 \text{ 18Low Voltage}$   
 Pin Size / 接触件直径:  $\phi 0.7\text{mm}$   
 Contact resistance / 接触电阻:  $\leq 12.5\text{m}\Omega$   
 Insulation resistance / 绝缘电阻:  $5000\text{M}\Omega$  (测试电压  $500\text{V}(\text{DC})$ )  
 Withstand voltage / 耐压:  $850\text{V}(\text{AC})$   
 Rated working current / 额定工作电流:  $5.5\text{A}$

Other Specification / 其它规格:

Contact PIN / 接触体: Gold plated Tin bronze / 锡青铜镀金  
 Housing Material / 外壳材质: PEEK  
 Other Shell Material / 其它壳体材质: 铜镀镍  
 Insulator material / 绝缘体材料: PPS  
 IP Rating / 防护等级:  $\text{IP50}$

\*ALL MATERIALS ARE ROHS COMPLIANT / 所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

A

B

C



D

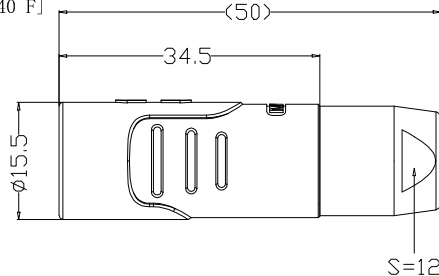

—K

S=12

Mark point  
标识点



Socket front view  
插座前视图

Mark point  
标识点




view K  
K向孔位排列

DRAWN BY:  
绘图: P003 2024.05.28  
 CHECKED BY:  
审核: Z01 2024.05.28  
 APPROVED BY:  
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)  
 $\leq 10 \pm 0.1$   
 $< 10 \sim 20 \pm 0.15$   
 $< 20 \sim 50 \pm 0.3$   
 Angle  $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位  
UNIT: mm  
 比例  
SCALE: 1:1  
 名称  
NAME: A4

REV/版本 A1 SHEET: 1 OF 1

名称 PART NAME	DHA-2BP浮动式插座 (不带护套式尾帽) DHA-2BP Floating socket (without jacketed tail cap)
型号 PART NAME	DHA. 2BP. 318. KWLLD82