

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]
 Shock Resistance/冲击 : 100g[6ms]
 Endurance (Shell)/机械寿命 : 5000+
 Cable/配接电缆: $\phi 9.1\text{mm}-\phi 10.0\text{mm}$

2. 电气性能




Insert Configuration/针芯配置: 2BP. 318 18Low Voltage
 Pin Size/接触件直径: $\phi 0.7\text{mm}$
 Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$
 Insulation resistance/绝缘电阻: 5000Ω (测试电压500V(DC))
 Withstand voltage/耐电压: 850V(AC)
 Rated working current额定工作电流: 5.5A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质 : PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

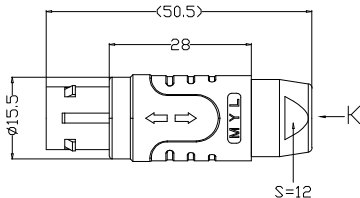


view K
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28	
CHECKED BY: 审核: Z01	2024.05.28	
APPROVED BY: 核准: P005	2024.05.28	

美易连电子科技(深圳)有限公司
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)
$\leq 10 \pm 0.1$
$< 10^\circ \leq 20^\circ \pm 0.15$
$< 20^\circ \leq 50^\circ \pm 0.3$
Angle $\pm 1^\circ$



FIRST ANGLE PROJECTION

UNIT: mm	名称	TG-2BP直式插头(不带护套式尾帽)
比例	PART NAME	TG-2BP Straight Plug (without jacketed tail cap)
SCALE: 1:1	型号	TGG. 2BP. 318. KWKAD102
SIZE: A	PART NAME	

REV/版本	A1	SHEET: 1 OF 1
--------	----	---------------

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8