

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : ≤95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr



### Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: Ø9.1mm-Ø10.0mm

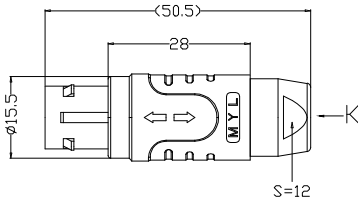

## 2. 电气性能

Insert Configuration/针芯配置: 2BP. 303 3Low Voltage

Pin Size/接触件直径: Ø1.6mm

Contact resistance接触电阻: ≤4mΩ

Insulation resistance/绝缘电阻: 5000MΩ (测试电压500V(DC))

Withstand voltage/耐电压: 2400V(AC)

Rated working current额定工作电流: 17.0A

### Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质 : 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图



view K  
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 批准: P005	2024.05.28



美易连电子科技(深圳)有限公司  
Mei Yilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10~≤20 ±0.15 <20~≤50 ±0.3 Angle ±1°		单位 UNIT: mm	名称 PART NAME	TG-2BP直式插头(不带护套式尾帽) TG-2BP Straight Plug (without jacketed tail cap)
	FIRST ANGLE PROJECTION	比例 SCALE: 1:1	型号 PART NAME	TGA. 2BP. 303. KWLAD102
	REV/版本	A1	SHEET: 1 OF 1	