

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $\leq 95\%$ [at $60^{\circ}\text{C} / 140^{\circ}\text{F}$]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g [$10\text{Hz} \sim 2000\text{Hz}$]

Shock Resistance/冲击: 100g [6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 3.4\text{mm} - \phi 4.3\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 2BP. 308 8Low Voltage

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))

Withstand voltage/耐电压: 1500V(AC)

Rated working current额定工作电流: 10.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK




Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

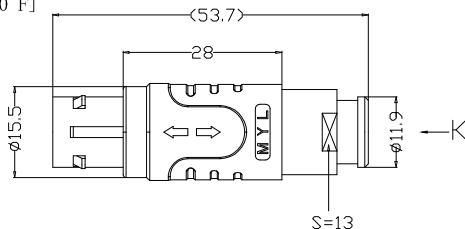


DRAWN BY: 绘图: P003	2024. 05. 28
CHECKED BY: 审核: Z01	2024. 05. 28
APPROVED BY: 核准: P003	2024. 05. 28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)

≤ 10	± 0.1
$< 10^{\circ} \leq 20$	± 0.15
$< 20^{\circ} \leq 50$	± 0.3
Angle	$\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位
UNIT: mm

名称

比例
SCALE: 1: 1

型号
SIZE: A4

REV/版本

TG-2BP直式插头(护套式尾帽)
TG-2BP Straight Plug
(with jacketed tail cap)

型号
PART NAME: TGG. 2BP. 308. KWKAD45Z

REV/版本 A1 SHEET: 1 OF 1 PART NAME