

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $\leq 95\%$  [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 8.1\text{mm}-\phi 9.0\text{mm}$

## 2. 电气性能

Insert Configuration/针芯配置: 2BP, 316 16Low Voltage

Pin Size/接触件直径: $\phi 0.7\text{mm}$

Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压: 950V(AC)

Rated working current额定工作电流: 6.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK



Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS


IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

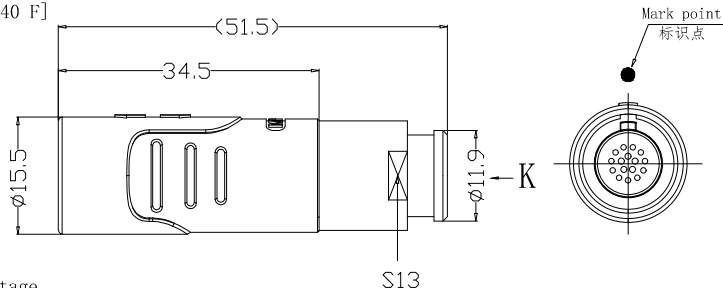

Socket front view  
插座前视图



view K  
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28		<b>美易连电子科技(深圳)有限公司</b> Meiyilian electronic technology(shenzhen)Co.,Ltd.		
CHECKED BY: 审核: Z01	2024.05.28		单位 UNT: mm	名称 PART NAME	DHA-2BP浮动式插座(带护套式尾帽) DHA-2BP Floating socket (with jacketed tail cap)
APPROVED BY: 核准: P005	2024.05.28		比例 SCALE: 1: 1	型号 PART NAME	DHA, 2BP, 316, KWLLD92Z
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^{\circ} \sim 20^{\circ} \pm 0.15$ $< 20^{\circ} \sim 50^{\circ} \pm 0.3$ Angle $\pm 1^{\circ}$		 FIRST ANGLE PROJECTION	REV/版本 A1	SHEET: 1 OF 1	

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8