

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $<95\%$ [at $60\text{ deg C} / 140\text{ F}$]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g [10Hz~2000Hz]

Shock Resistance/冲击: 100g [6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 6.1\text{mm}-\phi 7.0\text{mm}$

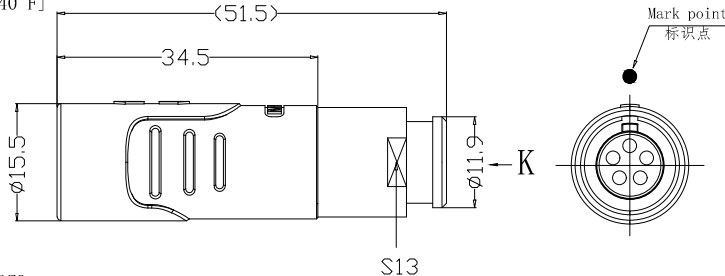

2. 电气性能

Insert Configuration/针芯配置: 2BP.305 5Low Voltage

Pin Size/接触件直径: $\phi 1.3\text{mm}$

Contact resistance接触电阻: $\leq 5\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))

Withstand voltage/耐电压: 1750V (AC)

Rated working current额定工作电流: 14.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



view K
K向孔位排列


view K
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 批准: P005	2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤ 10	± 0.1
$< 10^{\circ} \leq 20$	± 0.15
$< 20^{\circ} \leq 30$	± 0.3
Angle	$\pm 1^{\circ}$



FIRST ANGLE PROJECTION

REV./版本	A1
---------	----

单位 UNIT:	mm
比例 SCALE:	1: 1
尺寸 SIZE:	MA
SHEET: 1 OF 1	

名称 PART NAME	DHG-2BP浮动式插座(带护套式吊钩) DHG-2BP Floating socket (with jacketed tail cap)
型号 PART NAME	DHG. 2BP. 305. KWKLD72Z