

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr


Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: ϕ 9.1mm- ϕ 10.0mm

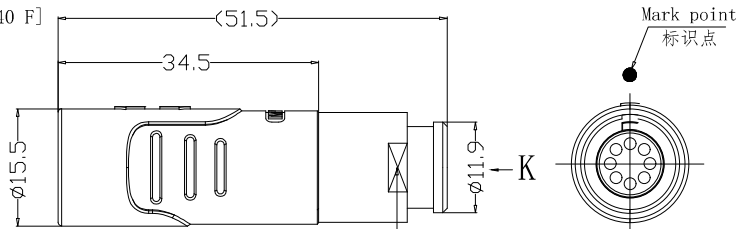

2. 电气性能

Insert Configuration/针芯配置: 2BP. 308 8Low Voltage

Pin Size/接触件直径: ϕ 0.9mm

Contact resistance接触电阻: \leq 9m Ω

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1500V(AC)

Rated working current额定工作电流: 10.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质 : 铜镀镍


Insulator material/绝缘体材料: PEEK

IP Rating/防护等级 : IP50



*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

S13

Mark point
标识点



view K
K向孔位排列

DRAWN BY: 绘图: P003 CHECKED BY: 审核: Z01 APPROVED BY: 核准: P005 2024.03.28 2024.05.28 2024.05.28	 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	单位 UNIT: mm 名称 PART NAME DWG-2BP浮动式插座(带护套式尾帽) DHG-2BP Floating socket (with jacketed tail cap)
GENERAL TOLERANCE (UNLESS SPECIFIED) ≤ 10 ± 0.1 $< 10^\circ \leq 20$ ± 0.15 $< 20^\circ \leq 50$ ± 0.3 Angle $\pm 1^\circ$	 FIRST ANGLE PROJECTION 比例 SCALE: 1:1 名称 PART NAME 型号 PART NAME	尺寸 SIZE: A4 SHEET: 1 OF 1 名称 PART NAME DHG. 2BP. 308. KWKLD102Z