

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $<95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Shielding /屏蔽性能:  $75\text{dB}(10\text{MHz}) \quad 40\text{dB}(1\text{GHz})$

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$

Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 7.1\text{mm} - \phi 8.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 2BP. 310 10Low Voltage

Pin Size/接触件直径:  $\phi 0.9\text{mm}$

Contact resistance接触电阻:  $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压 $500\text{V}(\text{DC})$ )

Withstand voltage/耐电压:  $1450\text{V}(\text{AC})$

Rated working current额定工作电流:  $8.0\text{A}$

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50



\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

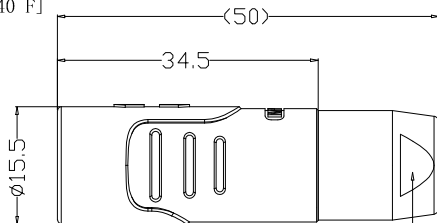

-K


S=12

Mark point  
标识点



Socket front view  
插座前视图

Mark point  
标识点



view K  
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司  
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10$	$\pm 0.1$
$< 10^{\circ} \sim \leq 20$	$\pm 0.15$
$< 20^{\circ} \sim \leq 30$	$\pm 0.3$
Angle	$\pm 1^{\circ}$



FIRST ANGLE PROJECTION

REV/版本	A1
--------	----

单位 UNIT: mm	名称
比例 SCALE: 1: 1	PART NAME
尺寸 SIZE: A4	型号 PART NAME

DHA-2BP浮动式插座(不带护套式尾帽) DHA-2BP Floating socket (without jacketed tail cap)
DHA. 2BP. 310. KWLLD82

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8