

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $<=95\%$ [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\varnothing 8.1\text{mm} - \varnothing 9.0\text{mm}$

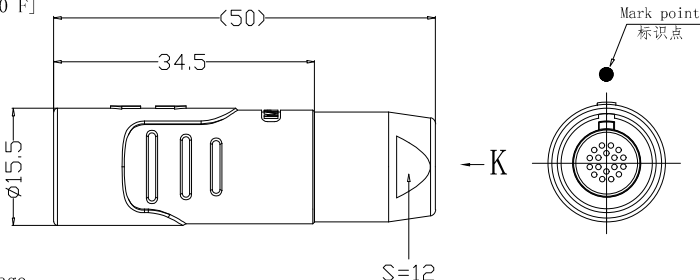

2. 电气性能

Insert Configuration/针芯配置: 2BP.318 18Low Voltage

Pin Size/接触件直径: $\varnothing 0.7\text{mm}$

Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))

Withstand voltage/耐电压: 850V(AC)

Rated working current额定工作电流: 5.5A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS



IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



view K
K向孔位排列

| | |
|--------------------------|------------|
| DRAWN BY: 绘图: P003 | 2024.05.28 |
| CHECKED BY: 审核: Z01 | 2024.05.28 |
| APPROVED BY: 核准: P005 | 2024.05.28 |

| | | | | |
|--|----|-------------------|------------------------------|---|
|  美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd. | | 单位 UNIT: mm | 名称 PART NAME | DHG-2BP浮动式插座(不带护套式引脚) DHG-2BP Floating socket (without jacketed tail cap) |
|  FIRST ANGLE PROJECTION | | 比例 SCALE: 1: 1 | 型号 DHG. 2BP. 318. KWLLD92 | |
| REV/版本 | A1 | SHEET: 1 OF 1 | PART NAME | |

GENERAL TOLERANCE
(UNLESS SPECIFIED)

$\leq 10 \pm 0.1$
 $< 10^{\circ} \sim 20^{\circ} \pm 0.15$
 $> 20^{\circ} \sim 50^{\circ} \pm 0.3$
 Angle $\pm 1'$