

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

A Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 3.1\text{mm}-\phi 4.0\text{mm}$

B 2. 电气性能

Insert Configuration/针芯配置: 2BP.302 2Low Voltage

Pin Size/接触件直径: $\phi 2.0\text{mm}$

Contact resistance接触电阻: $\leq 3.5\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))

Withstand voltage/耐电压: 2100V(AC)

Rated working current额定工作电流: 30.0A

C Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK



Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS


IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/位图

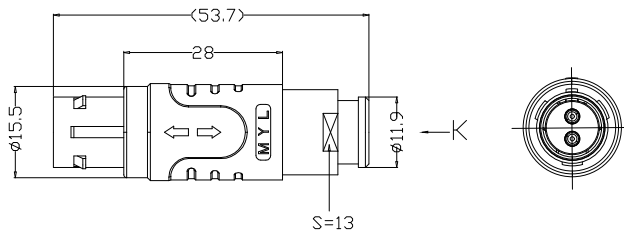

Plug front view
插头前视图



view K
K向孔位排列

D

DRAWN BY: 绘图: P003 2024.05.28 CHECKED BY: 审核: Z01 2024.05.28 APPROVED BY: 核准: P005 2024.05.28		美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	
		单位 UNITS: mm	名称 PART NAME
GENERAL TOLERANCE (UNLESS SPECIFIED)		比例 SCALE: 1:1	TG-2BP直式插头(带护套式尾帽) TG-2BP Straight Plug (with jacketed tail cap)
$\leq 10 \pm 0.1$ $< 10^\circ \leq 20 \pm 0.15$ $< 20^\circ \leq 50 \pm 0.3$ Angle $\pm 1^\circ$	FIRST ANGLE PROJECTION	型号 PART NAME	TGA. 2BP. 302. KWLAD42Z
REV/版本	A1	SHEET: 1 OF 1	

1

2

<https://www.myconnector.com/>

4

5

<https://www.myconnector.com/>

7

8