

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 5.1\text{mm}-\phi 6.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 2BP. 308 8Low Voltage

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V (DC))

Withstand voltage/耐电压: 1500V (AC)

Rated working current额定工作电流: 10.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/制图

A

B

C


D

A

B


C

D

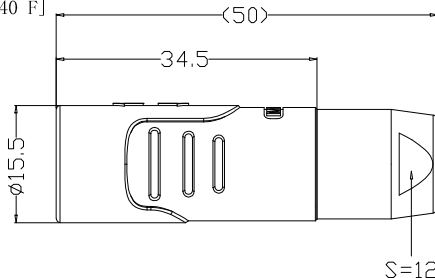


-K

Mark point
标识点




S=12



Socket front view
插座前视图

Mark point
标识点



view K
K向孔位排列

DRAWN BY:
绘图: P003

2024. 05. 28

CHECKED BY:
审核: Z01

2024. 05. 28

APPROVED BY:
核准: P003

2024. 05. 28

GENERAL TOLERANCE
(UNLESS SPECIFIED)

$\leq 10 \pm 0.1$

$< 10^\circ \leq 20 \pm 0.15$


$< 20^\circ \leq 50 \pm 0.3$

Angle $\pm 1^\circ$



美易连电子科技(深圳)有限公司

Meiyilian electronic technology (shenzhen) Co., Ltd.



FIRST ANGLE PROJECTION

单位
UNIT: mm

比例
SCALE: 1: 1

名称
PART NAME

型号
PART NAME

尺寸
SIZE: A1

REV/版本

AL

SHEET: 1 OF 1

DHA-2BP浮动式插座 (不带护套式尾帽)
DHA-2BP Floating socket
(without lacketed tail cap)

DHA. 2BP. 308. KWLLD62