

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $<=95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$ [10Hz~2000Hz]

Shock Resistance/冲击:  $100\text{g}$ [6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 5.1\text{mm} - \phi 6.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 2BP. 308 8Low Voltage

Pin Size/接触件直径:  $\phi 0.9\text{mm}$

Contact resistance接触电阻:  $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压:  $1500\text{V}$ (AC)

Rated working current额定工作电流:  $10.0\text{A}$

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/绘图

A

B

C



D

A


B

C

D

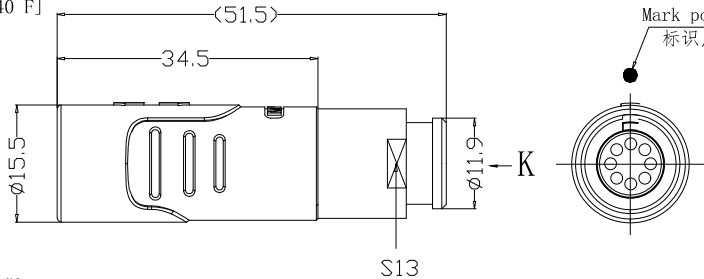

Socket front view  
插座前视图



view K  
K向孔位排列

DRAWN BY: 绘图: PPO3	2024.03.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: PPO3	2024.05.28
GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10 \pm 0.1$	
$< 10^{\circ} \leq 20 \pm 0.15$	
$< 20^{\circ} \leq 50 \pm 0.3$	
AngLe $\pm 1^{\circ}$	

	美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	
	单位 UNIT: mm	名称 PART NAME
比例 SCALE: 1:1	型号 PART NAME	DHA. 2BP. 308. KWLLD62Z
FIRST ANGLE PROJECTION	图例 	SHEET: 1 OF 1
REV/版本	A1	SHEET: 1 OF 1

1

2

<https://www.myconnector.com/>

4

5

<https://www.myconnector.com/>

7

8