

### 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃

Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


### Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 6.1\text{mm}-\phi 7.0\text{mm}$

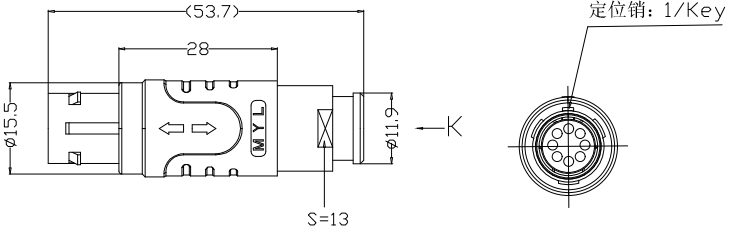

### 2. 电气性能

Insert Configuration/针芯配置: 2BP. 30S 8Low Voltage

Pin Size/接触件直径:  $\phi 0.9\text{mm}$

Contact resistance接触电阻:  $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压: 1500V(AC)

Rated working current额定工作电流: 10.0A

### Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK


Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/类型/内容	DATE/日期	DRAWN BY/制图




DRAWN BY: 蔡海/PO03 2024.05.28  
 CHECKED BY: 申核/Z01 2024.05.28  
 APPROVED BY: 蔡海/PO05 2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)  
 $\leq 10 \pm 0.1$   
 $< 10 \sim \leq 20 \pm 0.15$   
 $< 20 \sim \leq 50 \pm 0.3$   
 Angle  $\pm 1^\circ$



单位 UNIT: mm	名称	TG-2BP直式插头(带护套式尾帽)
比例 SCALE: 1:1	PART NAME	TG-2BP Straight Plug (with jacketed tail cap)
SIZE: AA	型号	TGG. 2BP. 30S. KWKAD72Z
REV/版本 A1	PART NAME	
-SHEET: 1 OF 1		