

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $<=95\%$ [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]


Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 3.1\text{mm} - \phi 4.0\text{mm}$

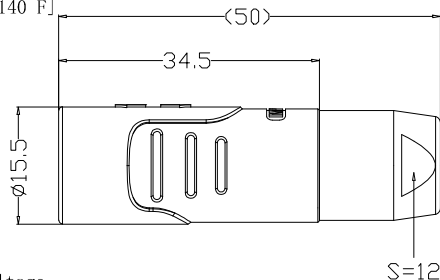

← K

S=12



2. 电气性能

Insert Configuration/针芯配置: 2BP. 314 14Low Voltage


Pin Size/接触件直径: $\phi 0.7\text{mm}$

Contact resistance接触电阻: $\leq 12.5\text{m}\Omega$


Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))

Withstand voltage/耐电压: 1150V(AC)

Rated working current额定工作电流: 6.5A



Socket front view
插座前视图



view K
K向孔位排列

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金



Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

DRAWN BY: 绘图: P003 2024. 05. 28 CHECKED BY: 审核: Z01 2024. 05. 28 APPROVED BY: 核准: P005 2024. 05. 28	 MEIYILIAN 美易连	美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	
		单位 UNIT: mm 名称 PART NAME 比例 SCALE: 1: 1 型号 PART NAME	DHA-2BP浮动式插座(不带护套式尾帽) DHA-2BP Floating socket (without jacketed tail cap)
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^{\circ} \sim \leq 20^{\circ} \pm 0.15$ $< 20^{\circ} \sim \leq 50^{\circ} \pm 0.3$ Angle $\pm 1^{\circ}$	 FIRST ANGLE PROJECTION	名称 PART NAME 型号 PART NAME	DHA-2BP浮动式插座(不带护套式尾帽) DHA-2BP Floating socket (without jacketed tail cap)
REV/版本 A1	比例 SCALE: 1: 1 型号 PART NAME	名称 PART NAME 型号 PART NAME	DHA-2BP浮动式插座(不带护套式尾帽) DHA-2BP Floating socket (without jacketed tail cap)