

# 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

## Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 9.1\text{mm}-\phi 10.0\text{mm}$

## 2. 电气性能


Insert Configuration/针芯配置: 2BP, 302 2Low Voltage  
 Pin Size/接触件直径:  $\phi 2.0\text{mm}$   
 Contact resistance接触电阻:  $\leq 3.5\text{m}\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 2100V(AC)  
 Rated working current额定工作电流: 30.0A

## Other Specification/其它规格:


Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/发生内容	DATE/日期	DRAWN BY/绘图

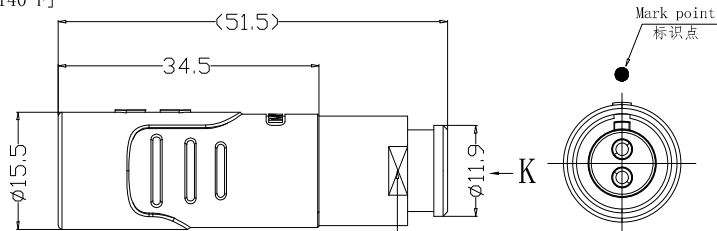


S13



view K  
K向孔位排列

DRAWN BY: 绘图: P003 2024.05.28 CHECKED BY: 审核: Z01 2024.05.28 APPROVED BY: 核准: P005 2024.05.28		美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.	
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^\circ \leq 20 \pm 0.15$ $< 20^\circ \leq 30 \pm 0.3$ Angle $\pm 1^\circ$			单位: mm 名称: PART NAME 比例: SCALE: 1:1 型号: DHG-2BP浮动式插座(带护套式尾帽) DHG-2BP Floating socket (with jacketed tail cap)
REV/版本: A1	SHEET: 1 OF 1	名称: PART NAME 型号: DHG-2BP. 302. KWKLD102Z	SHEET: 1 OF 1



FIRST ANGLE PROJECTION

REV/版本: A1  
SHEET: 1 OF 1

名称: PART NAME  
型号: DHG-2BP. 302. KWKLD102Z

单位: mm  
比例: SCALE: 1:1  
名称: PART NAME  
型号: DHG-2BP. 302. KWKLD102Z

DHG-2BP浮动式插座(带护套式尾帽)  
DHG-2BP Floating socket  
(with jacketed tail cap)

SHEET: 1 OF 1