

### 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $<95\%$  [at  $60 \text{ deg C} / 140 \text{ F}$ ]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

#### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$ [10Hz~2000Hz]  
 Shock Resistance/冲击:  $100\text{g}$ [6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\varnothing 8.1\text{mm}-\varnothing 9.0\text{mm}$

### 2. 电气性能



Insert Configuration/针芯配置: 3BP. 314 14Low Voltage  
 Pin Size/接触件直径:  $\varnothing 0.9\text{mm}$   
 Contact resistance接触电阻:  $\leq 6\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压:  $1200\text{V}$ (AC)  
 Rated working current额定工作电流:  $9.0\text{A}$

#### Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/制图

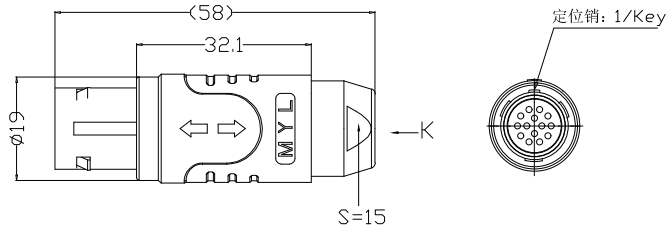

view K  
K向孔位排列

DRAWN BY: 绘图: P003 2024.05.28 CHECKED BY: 审核: Z01 2024.05.28 APPROVED BY: 核准: P005 2024.05.28		 美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.	
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^{\circ} \leq 20 \pm 0.15$ $< 20^{\circ} \leq 50 \pm 0.3$ Angle $\pm 1^{\circ}$		单位: mm 名称: TG-3BP直式插头(不带护套式尾帽) PART NAME: TG-3BP Straight Plug (without jacketed tail cap)	
FIRST ANGLE PROJECTION		比例: SCALE: 1:1 名称: TGG. 3BP. 314. KWLAD92 PART NAME:	
REV/版本	A1	型号	TGG. 3BP. 314. KWLAD92
<a href="https://www.myconnector.com/">https://www.myconnector.com/</a>		SHEET: 1 OF 1	