

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

A Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: Ø9.1mm-Ø10.0mm

B 2. 电气性能

Insert Configuration/针芯配置:3BP.326 26Low Voltage

Pin Size/接触件直径:Ø0.7mm

Contact resistance接触电阻:≤4.5mΩ

Insulation resistance/绝缘电阻:5000MΩ (测试电压500V(DC))

Withstand voltage/耐电压:950V(AC)

Rated working current额定工作电流:4.0A

C Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK


Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/绘图

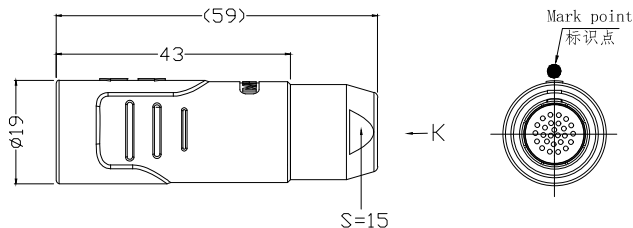

view K
K向孔位排列

D

DRAWN BY: 绘图:PD03	2024.05.28
CHECKED BY: 审核:Z01	2024.05.28
APPROVED BY: 核准:PD03	2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

<p>FIRST ANGLE PROJECTION</p>	单位 UNIT: mm	名称 PART NAME	DWG-3BP浮动式插座 (不带护套式尾帽) DHG-3BP floating socket (without jacketed tail cap)
	比例 SCALE: 1: 1	型号 PART NAME	
尺寸 SIZE: A1	REV/版本	A1	SHEET: 1 OF 1

GENERAL TOLERANCE
(UNLESS SPECIFIED)

≤10 ±0.1
<10 ~ ≤20 ±0.15
<20 ~ ≤50 ±0.3
Angle ±1°