

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~150°C
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]
 Shock Resistance/冲击: 100g[6ms]
 Endurance (Shell)/机械寿命: 5000+
 Cable/配接电缆: Ø4.1mm-Ø5.0mm

2. 电气性能



Insert Configuration/针芯配置:3BP.305 5Low Voltage
 Pin Size/接触件直径:Ø1.6mm
 Contact resistance接触电阻:≤4mΩ
 Insulation resistance/绝缘电阻:5000MΩ (测试电压500V(DC))
 Withstand voltage/耐电压:1900V(AC)
 Rated working current额定工作电流:19.0A

Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

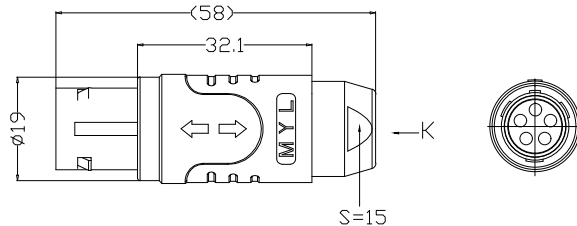

Plug front view
插头前视图



view K
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28	
CHECKED BY: 审核: Z01	2024.05.28	
APPROVED BY: 核准: P005	2024.05.28	

美易连电子科技(深圳)有限公司
 Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10° ≤20 ±0.15 <20° ≤50 ±0.3 Angle ±1°	 FIRST ANGLE PROJECTION	单位 (UNIT): mm	名称	TG-3BP直式插头(不带护套式尾帽)
		比例 SCALE: 1: 1	PART NAME	TG-3BP Straight Plug (without jacketed tail cap)
REV/版本	A1	型号 SIZE: M4	PART NAME	TGA.3BP.305.KWKAD52
SHEET: 1 OF 1				