

1. Product main performance / 产品主要性能指标:

Operating Temperature / 工作温度: -55°C ~ 150°C

Humidity (max) / 最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding / 屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion / 盐雾: 96hr


Mechanical data / 机械特性:

Vibration / 振动: 15g [10Hz ~ 2000Hz]

Shock Resistance / 冲击: 100g [6ms]

Endurance (Shell) / 机械寿命: 5000+

Cable / 配接电缆: $\phi 5.1\text{mm} - \phi 6.0\text{mm}$

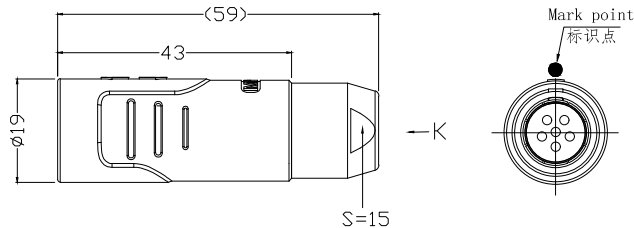

2. 电气性能

Insert Configuration / 针芯配置: 3BP.306 6Low Voltage


Pin Size / 接触件直径: $\phi 1.6\text{mm}$

Contact resistance / 接触电阻: $\leq 4\text{m}\Omega$

Insulation resistance / 绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage / 耐电压: 1600V(AC)

Rated working current / 额定工作电流: 17.0A



view K
K向孔位排列

Other Specification / 其它规格:

Contact PIN / 接触体: Gold plated Tin bronze / 锡青铜镀金

Housing Material / 外壳材质: PEEK

Other Shell Material / 其它壳体材质: 铜镀镍

Insulator material / 绝缘体材料: PEEK

IP Rating / 防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT / 所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图

DRAWN BY:
绘图: P003 2024.05.28
CHECKED BY:
审核: Z01 2024.05.28
APPROVED BY:
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen) Co., Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)
 $\leq 10 \pm 0.1$
 $< 10^\circ \leq 20 \pm 0.15$
 $< 20^\circ \leq 50 \pm 0.3$
Angle $\pm 1^\circ$



FIRST ANGLE PROJECTION

UNIT: mm	名称	DHG-3BP浮动式插座 (不带护套式尾帽) DHG-3BP Floating socket (without jacketed tail cap)
比例 SCALE: 1:1	PART NAME	
SIZE: A4	型号 PART NAME	DHG. 3BP. 306. KWKL D62
REV/版本 A1	SHEET: 1 OF 1	