

### I. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 :  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿 :  $<=95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

### Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 14.5\text{mm} - \phi 15.4\text{mm}$

### 2. 电气性能

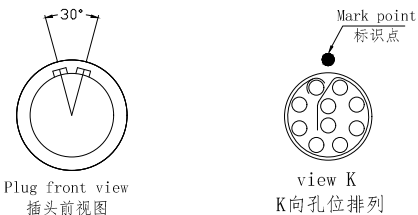
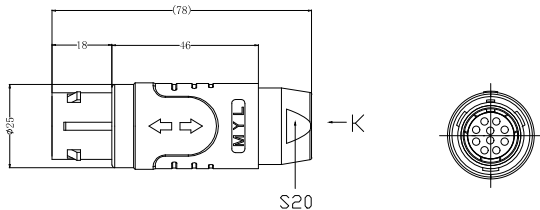
Insert Configuration/针芯配置: 4BP. 310 10Low Voltage  
 Pin Size/接触件直径:  $\phi 1.6\text{mm}$   
 Contact resistance接触电阻:  $\leq 4\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $50000\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 1850V(AC)  
 Rated working current额定工作电流: 17.0A



### Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE ROHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/制图



DRAWN BY: 绘图: P003      2024.05.28 CHECKED BY: 审核: Z01      2024.05.28 APPROVED BY: 核准: P005      2024.05.28	 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^{\circ} \sim 20^{\circ} \pm 0.15$ $< 20^{\circ} \sim 50^{\circ} \pm 0.3$ Angle $\pm 1^{\circ}$	 FIRST ANGLE PROJECTION	名称 PART NAME TGA-4BP直式插头(不带护套式尾帽) TG-4BP Straight Plug (without jacketed tail cap)
	#单位 UNIT: mm 比例 SCALE: 1:1 尺寸 SIZE: A4	型号 PART NAME TGA. 4BP. 310. KWLAD156
REV/版本	A1	SHEET: 1 OF 1